

8102 Minette 3~

Grindex drainage pumps are designed for professional use in tough applications like mines, construction sites, tunnel sites and other demanding industries. They are designed for pumping water that may contain solids


– up to the size of the strainer holes. Grindex drainage pumps are designed for continuous, unattended operation. They have proven their reliability and dependable performance in demanding areas like building and construction, mining, tunnelling, quarries, industries and rental applications.



Technical specification



Curves according to: Water, pure [100%], 4 °C, 1 kg/dm³, 1.569 mm²/s

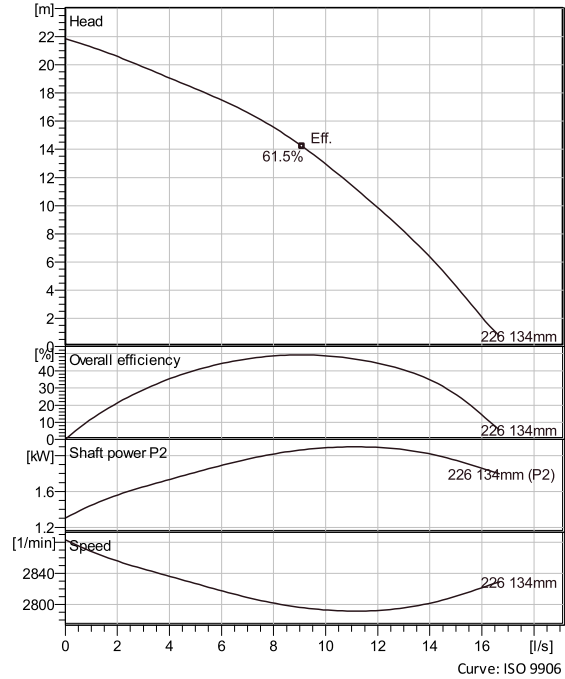

Configuration

Motor number B8102.172 13-10-2BB-W 2.2KW	Installation type S - Portable Semi permanent, Wet
Impeller diameter 134 mm	Discharge diameter 75 mm

Pump information

Impeller diameter 134 mm
Discharge diameter 75 mm
Inlet diameter
Maximum operating speed 2800 1/min
Number of blades 5

Materials

Impeller Hard-Iron

Project Xylect-20375928
Block

Created by João Santos **Last update** 7/25/2024
Created on 7/25/2024

8102 Minette 3~

Technical specification



Motor - General

Motor number B8102.172 13-10-2BB-W 2.2KW	Phases 3~	Rated speed 2800 1/min	Rated power 2.2 kW
Approval No	Number of poles 2	Rated current 4.7 A	Stator variant 1
Frequency 50 Hz	Rated voltage 400 V	Insulation class F	Type of Duty S1

Motor - Technical

Power factor - 1/1 Load 0.84	Motor efficiency - 1/1 Load 80.8 %	Total moment of inertia 0.00433 kg m ²	Starts per hour max. 15
Power factor - 3/4 Load 0.78	Motor efficiency - 3/4 Load 83.1 %	Starting current, direct starting 27 A	
Power factor - 1/2 Load 0.65	Motor efficiency - 1/2 Load 83.4 %	Starting current, star-delta 8.99 A	

Project Xylect-20375928
Block

Created by João Santos
Created on 7/25/2024

Last update 7/25/2024

8102 Minette 3~

Performance curve




Duty point

Flow

Head

Curves according to: Water, pure [100%], 4 °C, 1 kg/dm³, 1.569 mm²/s

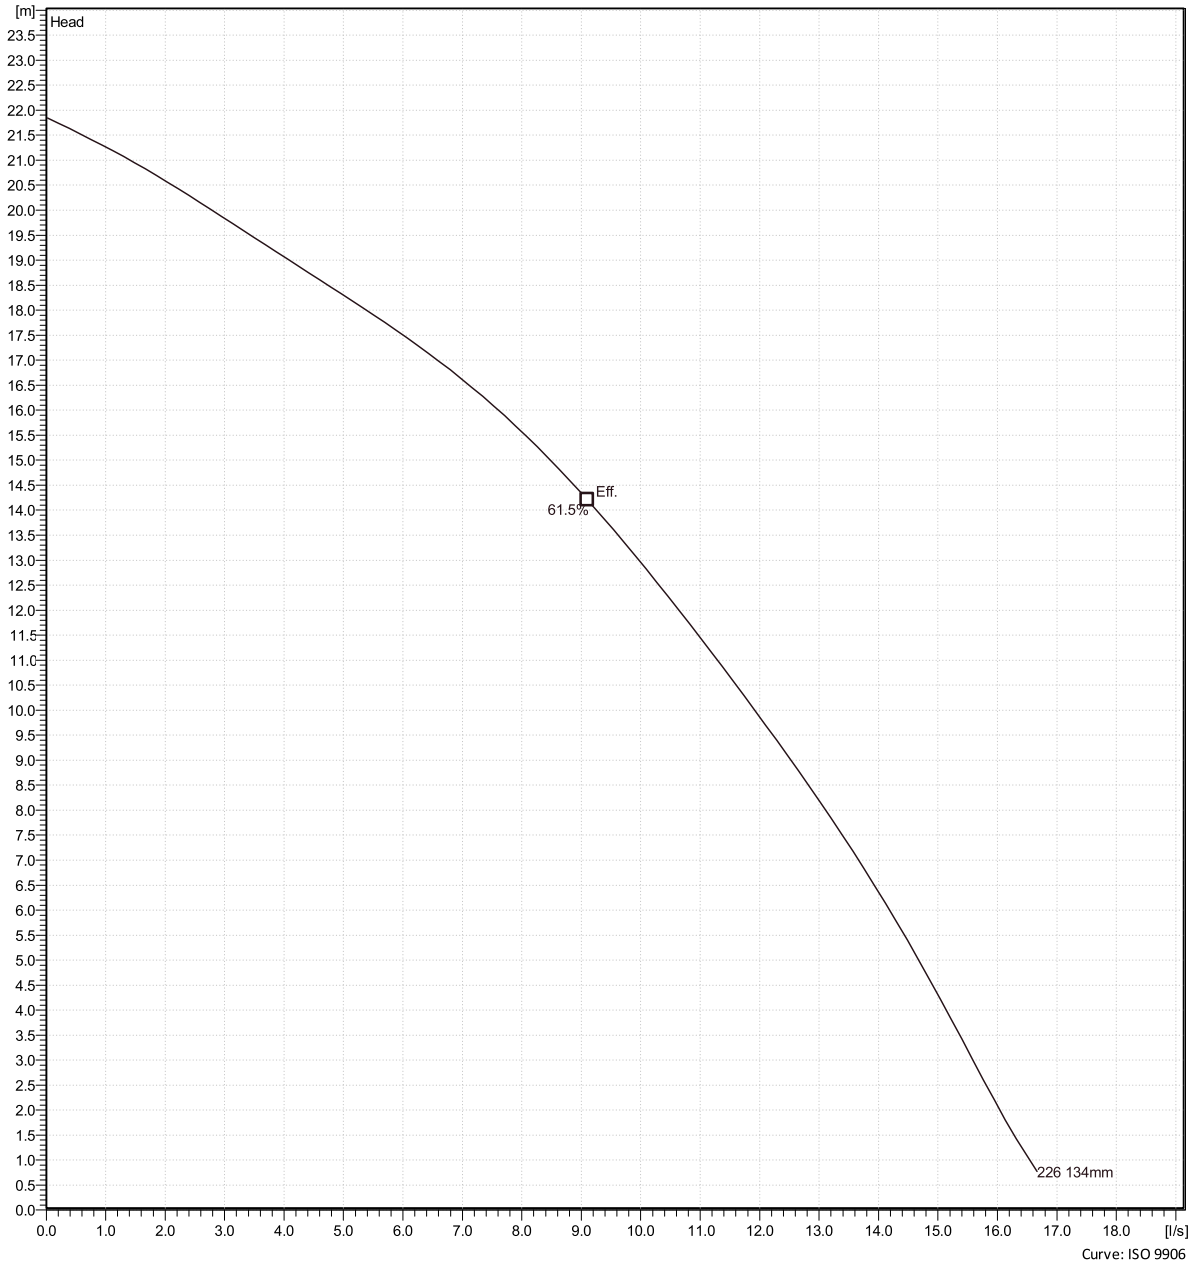

Project Xylect-20375928
Block

Created by João Santos
Created on 7/25/2024

Last update 7/25/2024


Curve: ISO 9906

8102 Minette 3~

Duty Analysis



Curves according to: Water, pure [100%], 4 °C, 1 kg/dm³, 1.569 mm²/s

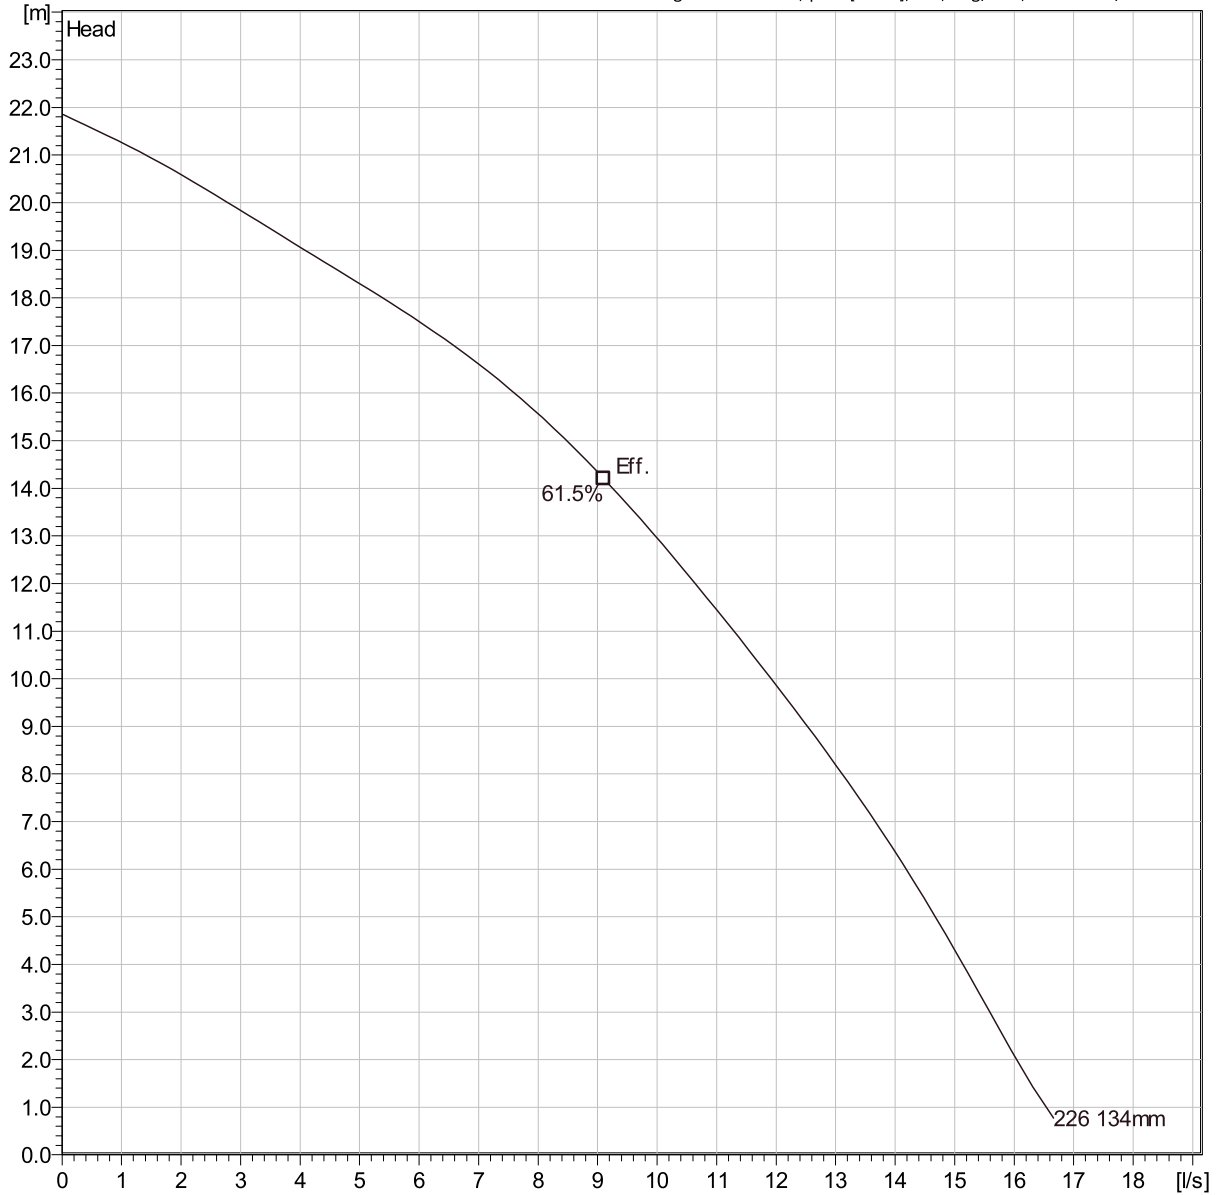


Curve: ISO 9906

Operating characteristics

Pumps/Systems	Flow	Head	Shaft power	Flow	Head	Shaft power	Hydr. eff.	Specific Energy	NPSHr
---------------	------	------	-------------	------	------	-------------	------------	-----------------	-------

Project	Xylect-20375928	Created by	João Santos	Last update	7/25/2024
Block		Created on	7/25/2024		

8102 Minette 3~
Dimensional drawing

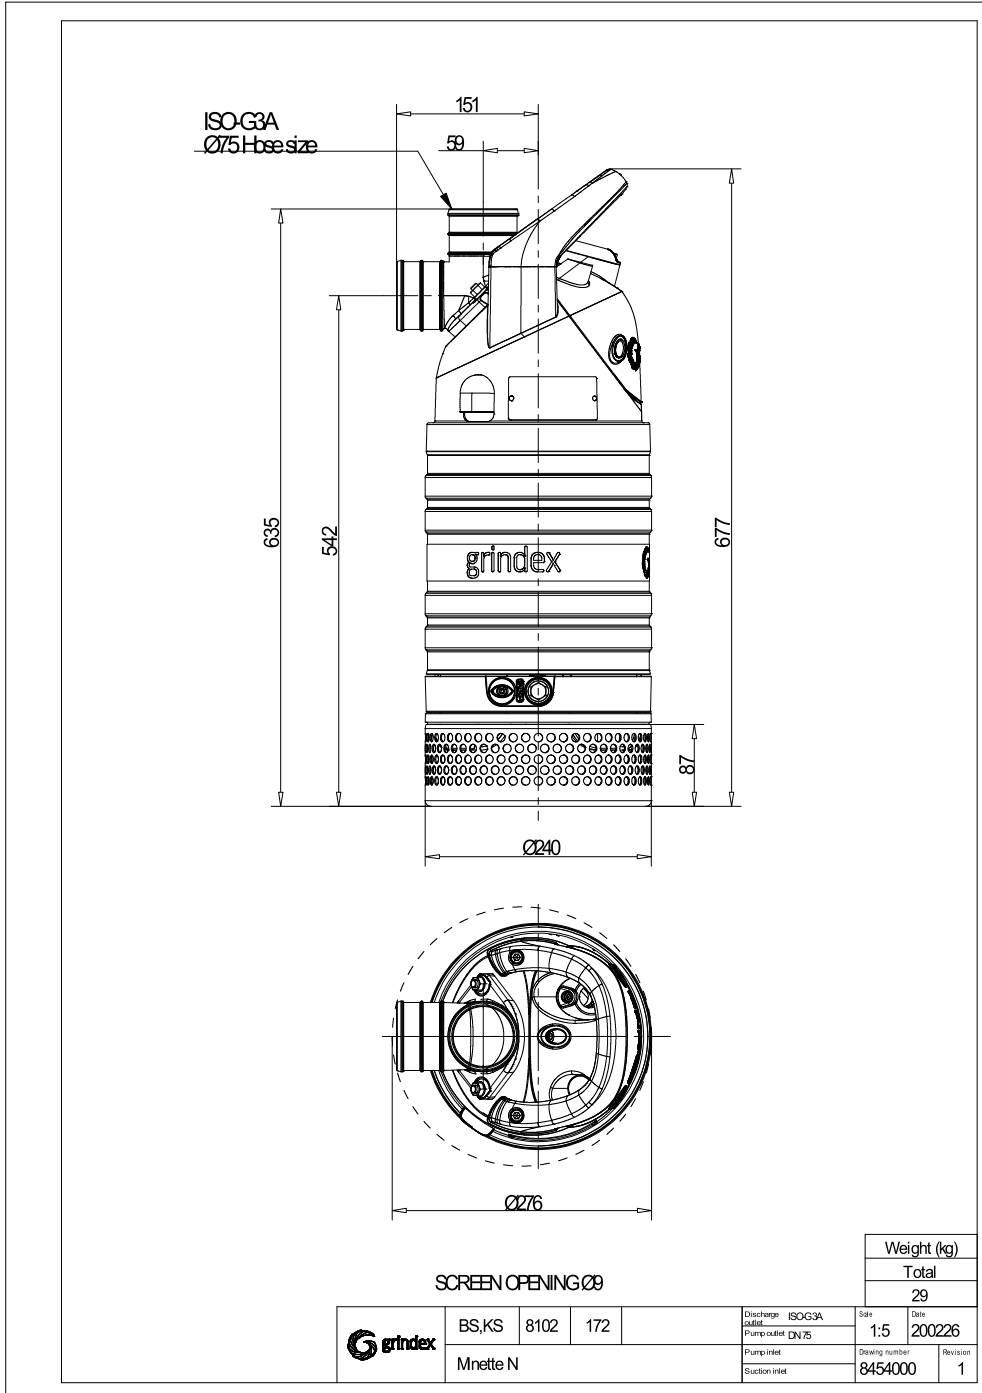

Project	Xylect-20375928	Created by	João Santos	Last update	7/25/2024
Block		Created on	7/25/2024		